
GEA 2H PLASdek® / CLEANdek Fills with HX-Factor

Vertical Flow Fills

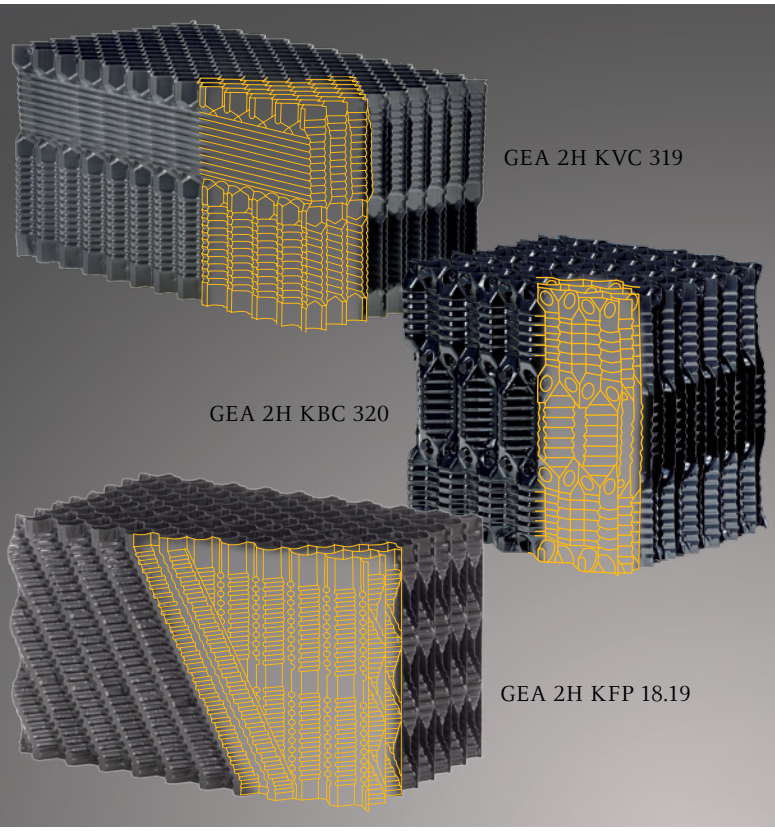

GEA 2H PLASdek® and CLEANdek vertical flow fills excel in high operation reliability. The surface of the packings is designed to limit accumulation of solids and thick biofilms. The vertical channels and open interfaces support an optimum solids discharge.

GEA 2H PLASdek® and CLEANdek vertical flow fills are designed for the use in counterflow cooling towers with poor water quality.

With different types in PP, PVC and PPHT and different material thickness, GEA 2H fills cover all customer requirements. Fill media in flame retardant or anti-bacterial types are available on request.

Bearing capacity and weight/m^3 depend on sheet thickness. It will be selected according to customer specification in consideration of process conditions and safety factors for temperatures, lifetime and material properties. Our experts recommend solutions for the support structure on request.

Our products have got the HX-Factor. It is our promise and stands for our unique competence in water and waste water treatment and in heat exchange (**HX** = **H**EAT E**X**CHANGE).

HX-Factors of our Vertical Flow Fills

- Self-supporting structure due to high bearing capacity with variable sheet thickness
- High resistance to erosion provided by reinforced PP edges
- Low pressure drop due to vertical direction of all channels
- Long service life due to chemical, bacterial and UV resistance of PP, PVC and PPHT

GEA 2H PLASdek® / CLEANdek Vertical Flow Fills

Technical Data

	PP	PVC
Maximum length	96 "	
Maximum width	24 "	
Maximum Height	12" or 24 "	
Continuous operating temperature*	176 °F	131 °F
Max. operating temp. (short time)*	194 °F	140 °F


*Depending on recipe/additives higher temperatures can be reached by HT-additives.

Maximum tolerances: On all dimensions +/- ¾ " or 2 % whichever is the greater. Tighter tolerances by prior agreement.

Maximum application temperature: The operational temperature should be measured at the inlet pipe of the system and should not exceed the maximum temperature stated in this document.

High temperature applications: Fill media in high-temperature version in PVC (up to 167 °F) and PP (up to 212 °F) available on request.

Types

Application Counter-flow Cooling Tower		Type	Material	Specific surface area ft²/ft³	Corrugation height mm
Strongly polluted water		KVP 323/623	PP	38	23
		KVC 323/623	PVC	38	23
Slightly to moderately polluted water		KBP 320/620	PP	43.3	20
		KBC 320/620	PVC	43.3	20
Moderately to strongly polluted water		KVP 319/619	PP	43.9	19
		KVC 319/619	PVC	43.9	19
Polluted water		KFP 18.19	PP	46	18 / 19
		KFC 18.19	PVC	46	18 / 19
Polluted water		KGP 320/620	PP	43.3	20
		KGC 320/620	PVC	43.3	20

PVC-material: Unplasticized (uPVC)

PP-material: Impact-resistant, environmentally friendly

PVC and PP material: Resistant to rot, fungi and most dissolved chemicals, UV-stabilized

Continuous vertical channels: KVP media types can be installed with continuous vertical channels by a special installation system.

Flammability: Products in flame retardant version according to American and European standards available on request. National regulations on fire protection should be taken into consideration before choosing a product.

This information has been put together with greatest care. However, any performance data given in this leaflet is subject to compliance with certain surrounding conditions and hence may vary from case to case. Further, we reserve the right to make changes at any time without notice. We strongly recommend (i) reconfirmation with GEA 2H whether this information is still fully valid, before using it for final designs and (ii) to verify performance data taking into account the actual surrounding conditions. GEA 2H takes no responsibility for any consequences due to non-compliance with these recommendations.

TÜVRheinland ZERTIFIZIERT Management System ISO 9001:2008 www.tuv.com ID 9105070210

GEA 2H Water Technologies, Germany, is ISO 9001:2008 certified.

GEA Heat Exchangers

GEA 2H Water Technologies GmbH

Dieselweg 5, 48493 Wettringen, Germany
Phone +49 25 57 / 93 90 0, Fax +49 25 57 / 93 90 49
2h.hx.de@gea.com, www.gea-2h.com

GEA 2H Water Technologies

14151 Interdrive West - Houston, Texas 77032
Contact: Shannon Knierim, Phone 281-227-7900, Fax 281-227-7084
shannon.knierim@gea.com

© GEA 2H Water Technologies GmbH. Subject to modification. K0-06/2014-WC-2014-0008-US